





Wiring Grommets

Features:

- Our Standard Range grommets are sized to suit a 1.6mm thick metal panel.

Technical Information

Material	Flexible PVC.
Temperature	-20°C to +65°C.
Thickness	To fit 1.6mm Panel Thickness.
Application	The primary function of an OPEN GROMMET is to protect the insulation on electrical cable from chafing when the cable is passed through a metal plate. The component is intended for use only in a static, unloaded application.

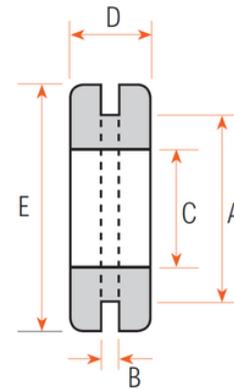

GSTE SKU	Colour	Dimensions (mm)				
		A	B	C	D	E
GCTWG64B	■	6.4	1.6	4.0	3.8	8.5
GCTWG93B	■	9.3	1.6	7.7	6.0	13.4
GCTWG123B	■	12.3	1.6	9.5	6.4	16.2
GCTWG158B	■	15.8	1.6	12.0	5.9	19.0
GCTWG202B	■	20.2	1.6	15.8	6.2	23.0
GCTWG250B	■	25.0	1.6	19.5	7.3	29.2
GCTWG310B	■	31.0	1.6	24.0	8.0	38.1
GCTWG374B	■	37.4	1.6	31.5	9.5	46.0
GCTWG505B	■	50.5	1.6	44.5	11.1	60.3