

# Standard Nylon Cable Ties — Fluorescent

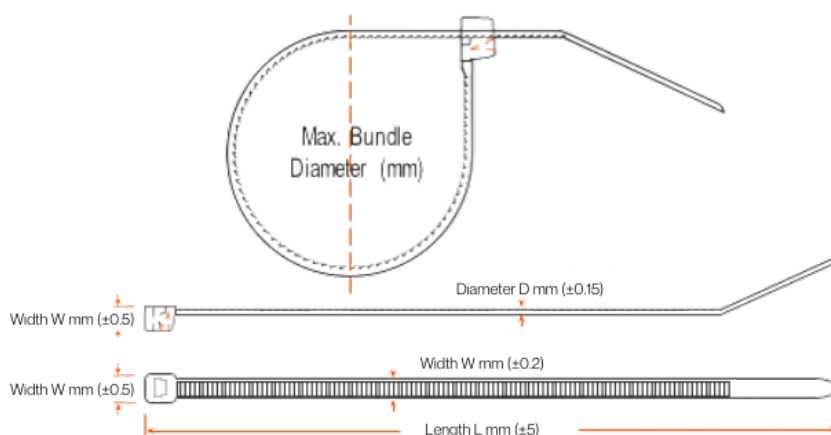








## Product features:

- High tensile strength with low insertion force
- Excellent resistance to weathering and external agents
- Ideal for highlighting a cable tie is there

### Technical Information

Quantity	100 cable ties per pack
Material	UL approved Nylon 66, 94V-2
Operating temperature	-40°C to +85°C
Flammability rating	UL 94 class V2
Dielectric strength	50,000 volts/mm
Compliance	European directives: ROHS - 2002/95/EC, ELV - 2000/53/EC, WEEE - 2002/96/EC



Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
100 x 2.5	22	8	550	GCT10025FL	
150 x 3.6	36	18	250	GCT15036FL	
200 x 4.8	52	22	150	GCT20048FL	
300 x 4.8	83	22	120	GCT30048FL	
370 x 4.8	105	22	90	GCT37048FL	
370 x 7.6	101	55	40	GCT37076FL	

\*Box quantity refers to quantity of packs

Please specify the colour after the Part No./SKU.

Colour Key: Black: B, Natural: N, Blue: BLU, Brown: BRO, Green: GRE, Orange: ORA, Purple: PUR, Red: RED, Silver: SIL, Yellow: YEL, Pink: PIN

### Disclaimer Notice

The above information is given only as guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.