

# Biodegradable Cable Ties



## Product features:

- Decompose under prolonged exposure to UV light, heat, moisture and microorganisms
- Ideal for use in temporary construction, events, operations or landscaping
- Provides a more ecological and environmentally friendly option
- Takes a minimum of 1 year for these cable ties to biodegrade
- Quick and simple to install in the same manner as their nylon counterparts


## Applications

Cable ties for holding and fixing cables, cable harnesses and various items for temporary use (pre-assembly operations, maintenance work, construction sites, events, etc.).

## Storage conditions

Keep away from humidity, heat and light to avoid any degradation of the product before use. Made of biodegradable material, these fasteners have a limited life span.

Technical Information	
Quantity	100 cable ties per pack
Material	Biodegradable material according to NF EN 13432: 2000 and ASTM D6400
Operating temperature	-20°C to +70°C
Compliance	NF EN 13432 : 2000, ASTM D6400 : 2004

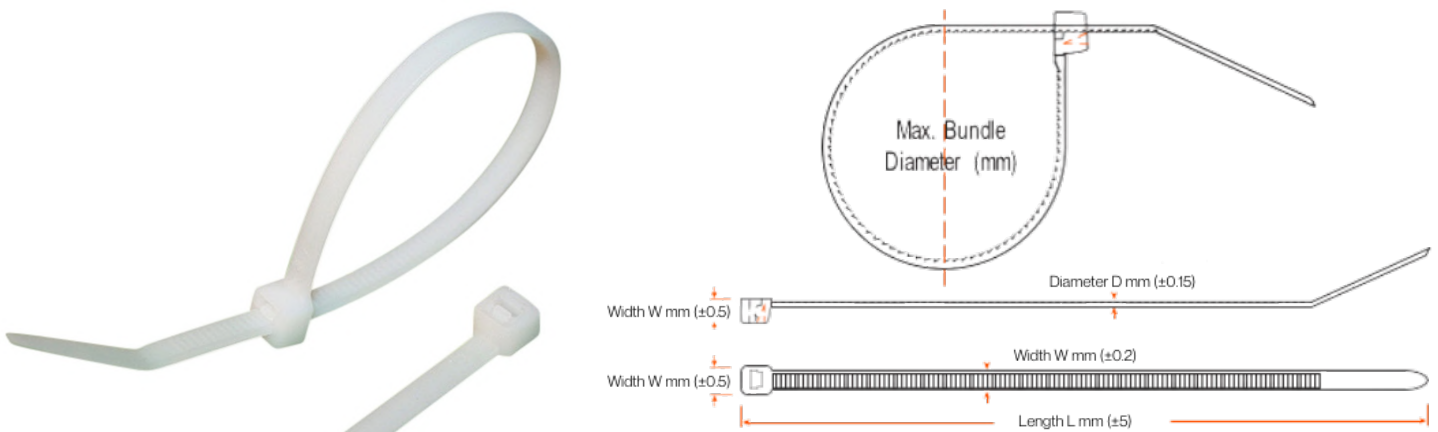

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	SKU	Colour
150 x 2.6	40	5	GCT15026NBIO	<input type="checkbox"/>
300 x 4.6	52	13	GCT30046NBIO	<input type="checkbox"/>
300 x 7.6	76	22	GCT30076NBIO	<input type="checkbox"/>

### Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.