UV Resistant
Cable Ties

REACH COMPLIANT · RoHS COMPLIANT · HF HALOGEN FREE

Technical Information

Quantity	100 cable ties per pack
Material	UL94V-2 flame rated, UL approved Nylon 66
Features	· Carbon black added for greater resistance to ultra violet in outdoor usage · Prolongs useful life of cable tie under sunshine/outdoor application · UV resistant cable tie: for outdoor use with UV feature
Application	Self-locking for fast and easy application.
Operating Temp	-40°C to +85°C
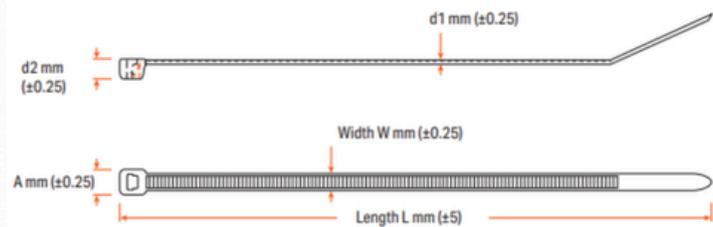
SKU	Colour	Width W (mm)	Length L (mm)	Depth D1 (mm)	Head Depth D2 (mm)	Head Width A (mm)	Max. Bundle Diameter (mm)	Min. Tensile Strength (kg)
GTSE-10025UVB	Black	2.5	100	1.00	3.7	4.4	22	8
GTSE-15036UVB	Black	3.6	150	1.40	4.8	6.4	36	18
GTSE-20048UVB	Black	4.8	203	1.35	5.6	8.0	52	22
GTSE-30048UVB	Black	4.8	300	1.50	5.3	8.0	83	22
GTSE-37048UVB	Black	4.8	368	1.50	5.3	8.0	105	22
GTSE-38076UVB	Black	7.6	370	1.50	6.8	12.5	101	55