

2:1 Assorted Heat Shrink Tubing - 250mm


Cut-Lengths


Product features:

- Flame retardant, very good chemical and solvent resistance, excellent electrical and physical properties, anti-static, flexible and high dielectric strength.
- Chemical resistance: Fuel, hydraulic fluid and lubricating oil.

Technical Information

Shrink Ratio:	2:1
Operating Temperature:	-55°C to +125°C
Material:	Polyolefin - standard wall heat shrink tube
Shrink Properties:	Shrinkable temperature: 80°C
Diameter:	6.4mm up to 25.4mm (Pre-shrinkage)
Application:	Electrical insulation, cable bundling and the provision of good physical protection to pipes and wires

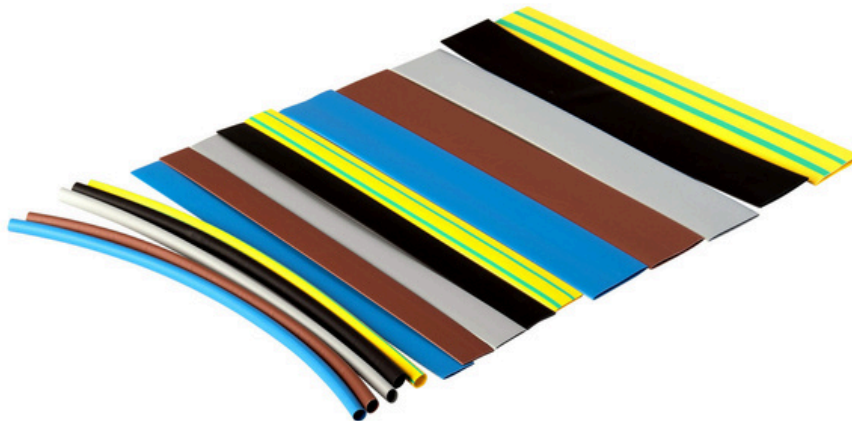

SKU	Colour	Quantity	ID x Length (mm)
GCT21HSTB64A		15 pcs (3 x each colour)	6.4 x 250
GCT21HSTB127A		15 pcs (3 x each colour)	12.7 x 250
GCT21HSTB254A		10 pcs (2 x each colour)	25.4 x 250
GCT21HSTB250A		15 pcs (3 x each colour)*	6.4, 12.7 & 25.4 x 250

*Each colour is a different size