




2:1 Jumbo Reels Heat Shrink

Product features:







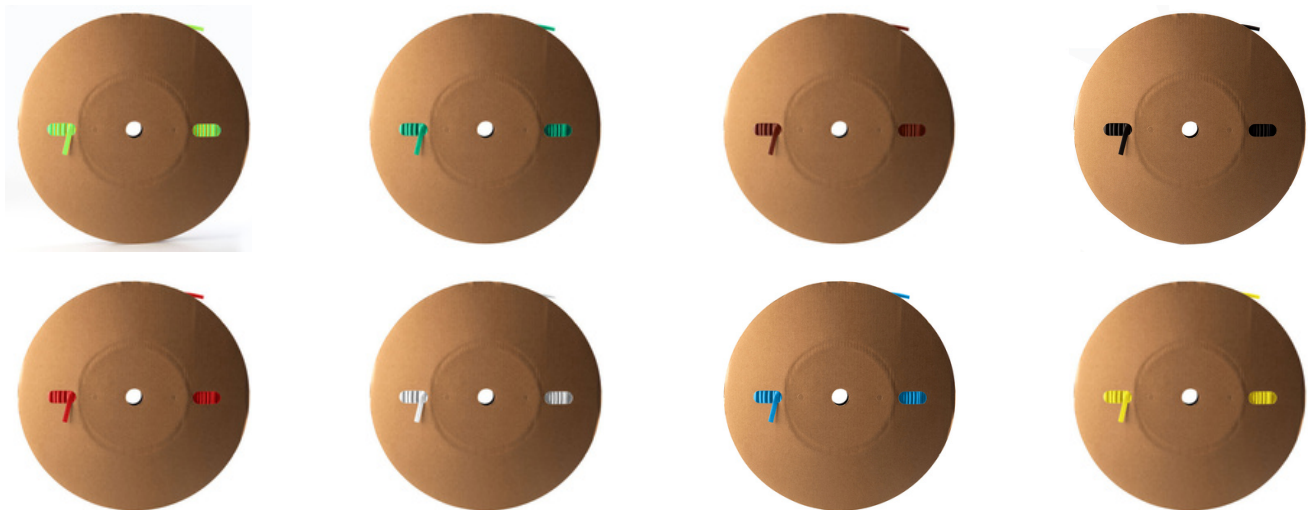





























- Flame retardant, very good chemical and solvent resistance, excellent electrical and physical properties, anti-static, flexible and high dielectric strength.
- Chemical resistance: Fuel, hydraulic fluid and lubricating oil.
- **PLEASE NOTE: The Red Heat Shrink Tubing is NOT Halogen Free.**

Technical Information

Shrink Ratio:	2:1
Operating Temperature:	-55°C to +125°C
Material:	Polyolefin - Standard wall heat shrink tube
Shrink Properties:	Shrinkable temperature: 80°C
Diameter:	1.2-101.6mm
Application:	Electrical insulation, cable bundling, pipes and wires giving good physical protection



GTSE SKU	Colour	Length(m)	Supplied Internal Diameter Min. (mm)	Recovered Internal Diameter Min. (mm)	Wall Thickness After Recovery (mm)
GCT21HSTJ12BLA	■	300	1.2	0.6	0.36(±0.10)
GCT21HSTJ16BLA	■	300	1.6	0.8	0.36(±0.10)
GCT21HSTJ24BLA	■	150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32BLA	■	150	3.2	1.6	0.45(±0.10)
GCT21HSTJ48BLA	■	60	4.8	2.4	0.56(±0.10)
GCT21HSTJ64BLA	■	60	6.4	3.2	0.56(±0.10)
GCT21HSTJ95BLA	■	60	9.5	4.8	0.56(±0.10)
GCT21HSTJ127BLA	■	60	12.7	6.4	0.56(±0.10)
GCT21HSTJ191BLA	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254BLA	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381BLA	■	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508BLA	■	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762BLA	■	25	76.2	38.1	1.46(±0.20)
GCT21HSTJ1016BLA	■	25	101.6	50.8	1.46(±0.20)

GTSE SKU	Colour	Length(m)	Supplied Internal Diameter Min. (mm)	Recovered Internal Diameter Min. (mm)	Wall Thickness After Recovery (mm)
GCT21HSTJ24BLU		150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32BLU		200	3.2	1.6	0.45(±0.10)
GCT21HSTJ48BLU		100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64BLU		100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95BLU		100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127BLU		100	12.7	6.4	0.56(±0.10)
GCT21HSTJ191BLU		60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254BLU		30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381BLU		30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508BLU		25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762BLU		25	76.2	38.1	1.46(±0.20)
GCT21HSTJ1016BLU		25	101.6	50.8	1.46(±0.20)
GCT21HSTJ48BRN		100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64BRN		100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95BRN		100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127BRN		60	12.7	6.4	0.56(±0.10)
GCT21HSTJ191BRN		60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254BRN		30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381BRN		30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508BRN		25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762BRN		25	76.2	38.1	1.46(±0.20)
GCT21HSTJ1016BRN		25	101.6	50.8	1.46(±0.20)
GCT21HSTJ12CLR	 Clear	300	1.2	0.6	0.36(±0.10)
GCT21HSTJ16CLR	 Clear	300	1.6	0.8	0.36(±0.10)
GCT21HSTJ24CLR	 Clear	150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32CLR	 Clear	150	3.2	1.6	0.45(±0.10)
GCT21HSTJ48CLR	 Clear	75	4.8	2.4	0.56(±0.10)
GCT21HSTJ64CLR	 Clear	60	6.4	3.2	0.56(±0.10)
GCT21HSTJ95CLR	 Clear	60	9.5	4.8	0.56(±0.10)
GCT21HSTJ127CLR	 Clear	60	12.7	6.4	0.56(±0.10)
GCT21HSTJ191CLR	 Clear	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254CLR	 Clear	30	25.4	12.7	0.90(±0.20)
GCT21HSTJ24GRN		150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32GRN		200	3.2	1.6	0.45(±0.10)
GCT21HSTJ48GRN		100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64GRN		100	6.4	3.2	0.56(±0.10)

GTSE SKU	Colour	Length(m)	Supplied Internal Diameter Min. (mm)	Recovered Internal Diameter Min. (mm)	Wall Thickness After Recovery (mm)
GCT21HSTJ95GRN	■	100	9.5	4.8	0.56(±0.10)
GCT21HSTJ27GRN	■	100	12.7	6.4	0.56(±0.10)
GCT21HSTM191GRN	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254GRN	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ32GY	■	200	3.2	1.6	0.45(±0.10)
GCT21HSTJ48GY	■	100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64GY	■	100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95GY	■	100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127GY	■	100	12.7	6.4	0.56(±0.10)
GCT21HSTJ191GY	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254GY	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381GY	■	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508GY	■	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762GY	■	25	76.2	38.1	1.46(±0.20)
GCT21HSTJ1016GY	■	25	101.6	50.8	1.46(±0.20)
GCT21HSTJ48GRY	■	100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64GRY	■	100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95GRY	■	100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127GRY	■	60	12.7	6.4	0.56(±0.10)
GCT21HSTJ191GRY	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254GRY	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381GRY	■	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508GRY	■	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762GRY	■	25	76.2	38.1	1.46(±0.20)
GCT21HSTJ1016GRY	■	25	101.6	50.8	1.46(±0.20)
GCT21HSTJ24RED	■	150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32RED	■	200	3.2	1.6	0.56(±0.10)
GCT21HSTJ48RED	■	100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64RED	■	100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95RED	■	100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127RED	■	100	12.7	6.4	0.56(±0.10)
GCT21HSTJ191RED	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTM254RED	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381RED	■	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508RED	■	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762RED	■	25	76.2	38.1	0.46(±0.20)

GTSE SKU	Colour	Length(m)	Supplied Internal Diameter Min. (mm)	Recovered Internal Diameter Min. (mm)	Wall Thickness After Recovery (mm)
GCT21HSTJ24WHI	□	150	2.4	1.2	0.45(±0.10)
GCT21HSTJ32WHI	□	150	3.2	1.6	0.45(±0.10)
GCT21HSTJ48WHI	□	75	4.8	2.4	0.56(±0.10)
GCT21HSTJ64WHI	□	60	6.4	3.2	0.56(±0.10)
GCT21HSTJ95WHI	□	60	9.5	4.8	0.56(±0.10)
GCT21HSTJ127WHI	□	60	12.7	6.4	0.56(±0.10)
GCT21HSTJ191WHI	□	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254WHI	□	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381WHI	□	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508WHI	□	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762WHI	□	25	76.2	38.1	1.46(±0.20)
GCT21HSTJ32YLV	■	200	3.2	1.6	0.45(±0.10)
GCT21HSTJ48YLV	■	100	4.8	2.4	0.56(±0.10)
GCT21HSTJ64YLV	■	100	6.4	3.2	0.56(±0.10)
GCT21HSTJ95YLV	■	100	9.5	4.8	0.56(±0.10)
GCT21HSTJ127YLV	■	100	12.7	6.4	0.56(±0.10)
GCT21HSTM191YLV	■	60	19.1	9.5	0.70(±0.10)
GCT21HSTJ254YLV	■	30	25.4	12.7	0.90(±0.15)
GCT21HSTJ381YLV	■	30	38.1	19.1	1.00(±0.15)
GCT21HSTJ508YLV	■	25	50.8	25.4	1.10(±0.20)
GCT21HSTJ762YLV	■	25	76.2	38.1	1.46(±0.20)