

Stainless Steel Cable Ties — Uncoated

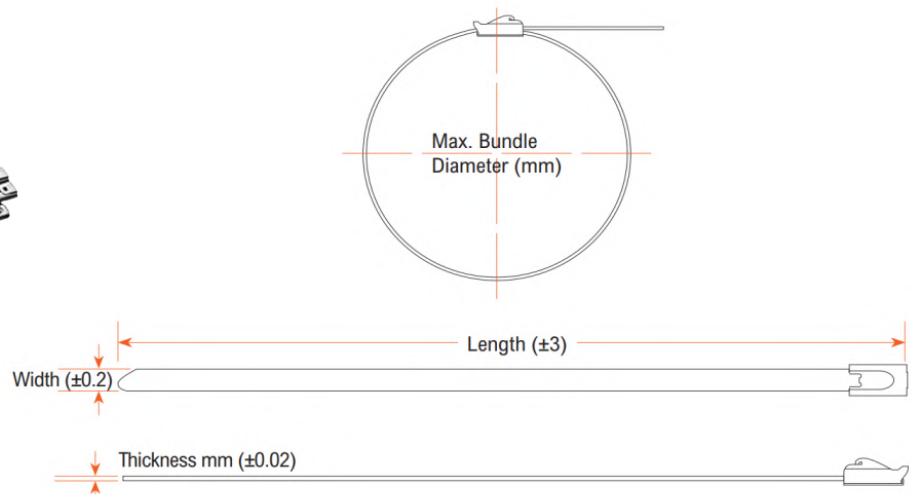


Product features:

- Extremely high tensile strength
- Resistant to weathering, ageing, fire and chemicals
- High temperature range







Technical Information

Quantity	100 cable ties per pack
Material	Marine Grade 316 Stainless Steel
Operating temperature	-80°C to +540°C



Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
150 x 4.6	40	68	50	GCT15046SS	■
150 x 7.9	40	136	25	GCT15079SS	■
200 x 4.6	56	68	50	GCT20046SS	■
200 x 7.9	56	136	25	GCT20079SS	■
260 x 4.6	75	68	50	GCT26046SS	■
300 x 4.6	88	68	50	GCT30046SS	■
300 x 7.9	88	136	25	GCT30079SS	■
360 x 4.6	107	68	25	GCT36046SS	■
360 x 7.9	107	136	25	GCT36079SS	■
520 x 4.6	158	68	25	GCT52046SS	■
520 x 7.9	158	136	25	GCT52079SS	■
620 x 4.6	190	68	25	GCT62046SS	■

*Box quantity refers to quantity of packs

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
620 x 7.9	190	136	20	GCT62079SS	
840 x 4.6	260	68	25	GCT84046SS	
840 x 7.9	260	136	10	GCT84079SS	
1000 x 4.6	311	68	25	GCT100046SS	
1000 x 7.9	311	136	10	GCT100079SS	
1200 x 4.6	373	68	25	GCT120046SS	

*Box quantity refers to quantity of packs

Fitting Stainless Steel Cable Ties


We recommend fitting stainless steel cable ties with one of our installation tools.

Whilst it is possible to install them by hand, it is essential that the tool is used to tension the cable ties, particularly when using larger sizes within the range.

Product features:

- High quality stainless steel cable tie tensioning and cutting tool
- Heavy duty tool with adjustable tension pressure
- Compatible with stainless steel cable ties including the coated range



Tool Length x Width (mm)	Use (Type of Cable Tie)	Cable Tie Thickness (mm)	Cable Tie Width (mm)	SKU	Colour
178 x 140	Stainless Steel	Up to 0.3	4.5 - 7.9	GCTSSIT	

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.