

# Bullet Female Quick Disconnects

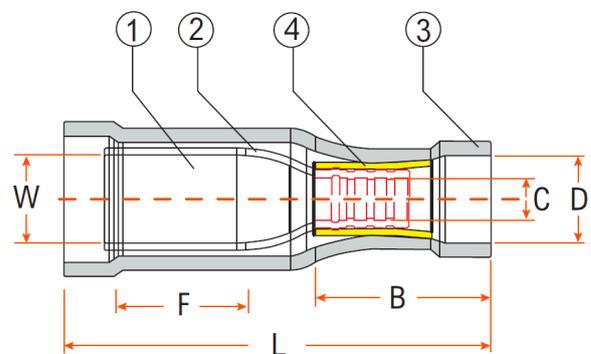

**Product features:**

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.

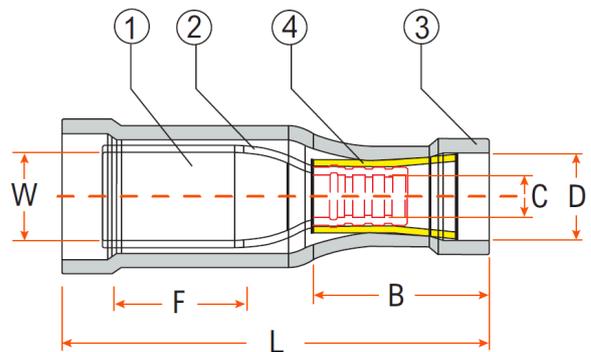
Technical Information	
Operating Temperature	-10°C to +75°C.
Material	<b>Conductor:</b> Brass   <b>Sleeve:</b> Copper tubular   <b>Insulation:</b> Vinyl   <b>Plating:</b> Tin
Voltage rating:	300V.



### Standard Internal Copper Sleeve



### Long Internal Copper Sleeve


**Material**

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

GTSE SKU	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)					
			B	C	D	W	L	F
GCTBUR4R	<span style="color: red;">■</span>	0.5-1.5	10.5	1.7	3.8	3.9	25.5	7.3
GCTBUR4RL	<span style="color: red;">■</span>	0.5-1.5	10.5	1.7	3.8	3.9	25.5	7.3
GCTBUR4B	<span style="color: blue;">■</span>	1.5-2.5	10.5	2.3	4.7	3.9	25.5	7.3
GCTBUR5B	<span style="color: blue;">■</span>	1.5-2.5	10.5	2.3	4.7	4.9	25.5	8.5
GCTBUR5BL	<span style="color: blue;">■</span>	1.5-2.5	10.5	2.3	4.7	4.9	25.5	8.5
GCTBUR5Y	<span style="color: yellow;">■</span>	4.0-6.0	13.7	3.4	6.2	4.9	28.0	8.5
GCTBUR5YL	<span style="color: yellow;">■</span>	4.0-6.0	13.7	3.4	6.2	4.9	28.0	8.5