



Bullet Male Quick Disconnects


Product features:

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.


Technical Information	
Operating Temperature	-10°C to +75°C.
Material	Conductor: Brass Sleeve: Copper tubular Insulation: Vinyl Plating: Tin
Voltage rating:	300V.



Standard Internal Copper Sleeve

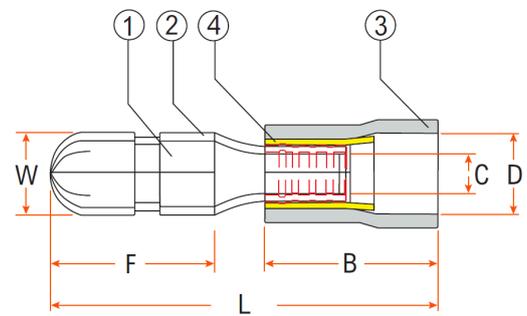

Long Internal Copper Sleeve

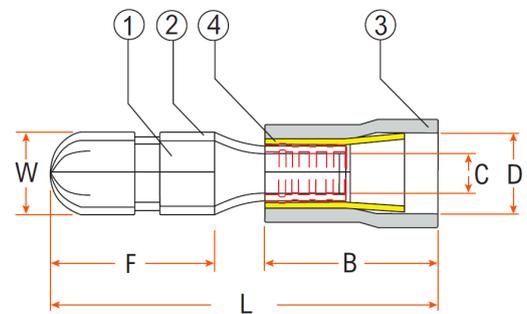

Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)					
			B	C	D	W	L	F
GCTBU4R		0.5-1.5	10.0	1.7	3.9	4.0	21.0	8.5
GCTBU4RL		0.5-1.5	10.0	1.7	3.9	4.0	21.0	8.5
GCTBU4B		1.5-2.5	10.0	2.3	4.7	4.0	21.0	8.5
GCTBU5B		1.5-2.5	10.0	2.3	4.7	4.0	21.0	8.5
GCTBU5BL		1.5-2.5	10.0	2.3	4.7	5.0	22.5	10.0
GCTBU5Y		4.0-6.0	13.0	3.4	6.2	5.0	25.5	10.0
GCTBU5YL		4.0-6.0	13.0	3.4	6.2	5.0	25.5	10.0