

Extended Tooth Releasable Cable Ties



(E474504)




Product features:

- Releasable mechanism aided with use of a screwdriver or tool
- High tensile strength with low insertion force
- Excellent resistance to weathering and external agents

Technical Information

Quantity	100 cable ties per pack
Material	UL Listed Nylon 66, 94V-2
Operating temperature	-40°C to +85°C
Flammability rating	UL 94 class V2
Dielectric strength	50,000 volts/mm

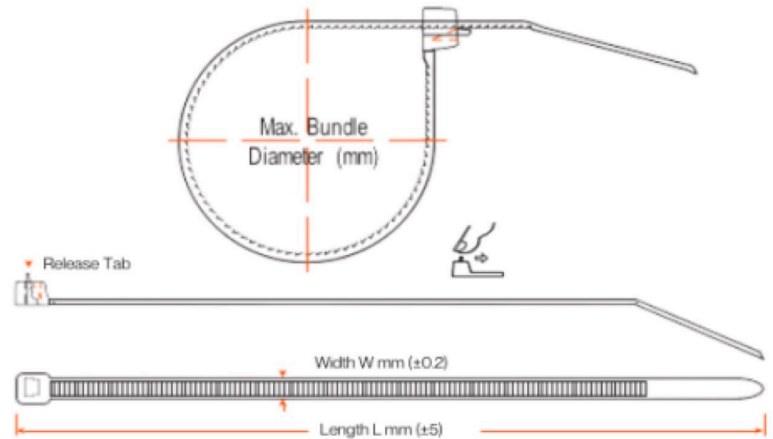

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
100 x 3.6	25	18	300	GCT10036REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
200 x 4.6	55	22	150	GCT20046REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
250 x 4.8	74	22	120	GCT25048REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
300 x 4.8	88	22	120	GCT30048REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
370 x 4.8	102	22	90	GCT37048REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
450 x 9.0	132	79	25	GCT45090REL	<input checked="" type="checkbox"/> <input type="checkbox"/>
780 x 9.0	227	79	20	GCT78090REL	<input checked="" type="checkbox"/> <input type="checkbox"/>

*Box quantity refers to quantity of packs

Please specify the colour after the Part No./SKU:

Colour Key: Black: B, Natural: N

Disclaimer Notice

The above information is given only as guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.