




# Blade Terminals


**Product features:**

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-10°C to +75°C
Material	<b>Conductor:</b> Copper   <b>Insulation:</b> Vinyl   <b>Plating:</b> Tin
voltage rating	600V

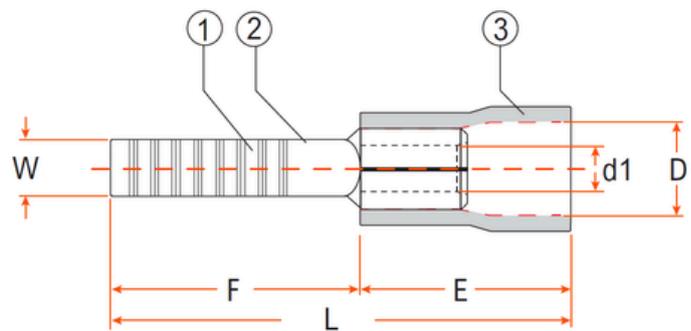
**Material**

- ① Copper
- ② Tin
- ③ Vinyl

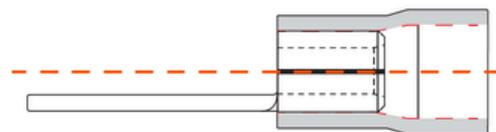

GTSE SKU	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)					
			D	d1	W	L	E	F
GCTB1023R	Red	0.5-1.5	4.3	1.7	2.3	20.0	10.0	10.0
GCTB1823R	Red	0.5-1.5	4.3	1.7	2.2	28.0	10.0	18.0
GCTB9028R	Red	0.5-1.5	4.3	1.7	2.8	19.0	10.0	9.0
GCTB1430R	Red	0.5-1.5	4.3	1.7	2.4	24.0	10.0	14.0
GCTB23184B	Blue	1.5-2.5	4.8	2.3	2.2	28.0	10.0	18.0
GCTB289B	Blue	1.5-2.5	4.8	2.3	2.8	1.7	10.0	5.0
GCTB2810Y	Yellow	4.0-6.0	6.7	3.4	2.8	23.0	13.0	10.0
GCTB4518Y	Yellow	4.0-6.0	6.7	3.4	4.5	31.0	13.0	18.0