




Butt Connector Terminals

Product features:

- Flared barrel for easy wire insertion.
- Wire stop feature to ensure correct wire position.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-10°C to +75°C
Material	Conductor: Brass Insulation: Vinyl Plating: Tin
Voltage rating:	600V

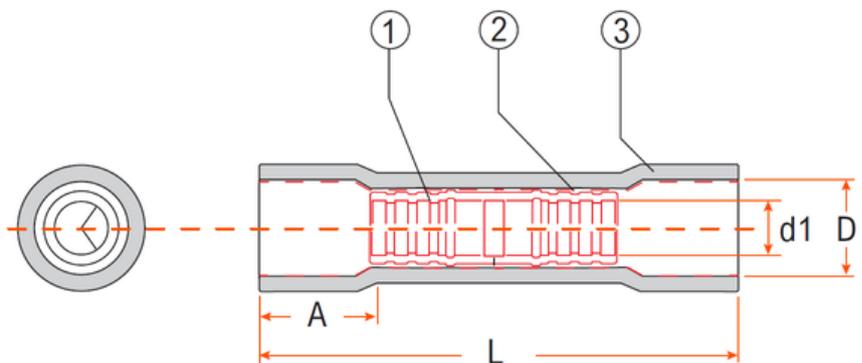

Material

- ① Brass
- ② Tin
- ③ Vinyl

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)			
			A	D	d1	L
GCTBC33R	■	0.5-1.5	5.8	4.3	1.8	24.5
GCTBC40B	■	1.5-2.5	5.8	4.8	2.4	24.5
GCTBC67Y	■	4.0-6.0	6.2	6.7	3.5	27.0