



Cable Butt Connectors

Product features:

- Excellent corrosion resistance and conductivity.
- Bell mouth for easy cable entry.
- Commonly used with cables carrying higher currents.

Technical Information


Material **Terminal body: Copper | Plating: Bright electro tin**

Operating Temperature 105° (without a cable).



Material

- ① Copper
- ② Bright electro tin

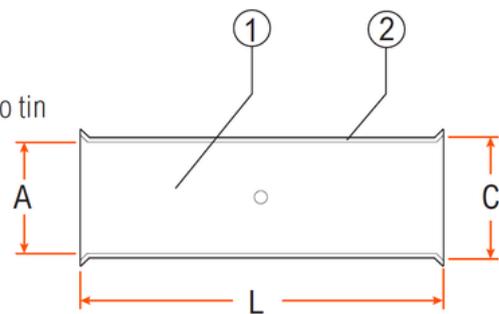

GTSE SKU	Wire Range (mm ²)	Dimensions (mm)		
		A	C	L
GCTCBC2.5	2.5	2.4	4.0	15
GCTCBC6	6	3.8	5.5	15
GCTCBC10	10	4.5	6.2	20
GCTCBC16	16	5.4	7.1	20
GCTCBC25	25	6.8	8.8	32
GCTCBC35	35	8.7	11.7	36
GCTCBC50	50	9.5	12.4	40
GCTCBC70	70	11.3	14.7	45
GCTCBC95	95	13.5	17.4	45
GCTCBC120	120	15.0	19.4	45
GCTCBC150	150	16.5	21.2	55
GCTCBC185	185	18.5	23.5	60
GCTCBC240	240	21.0	26.5	80
GCTCBC300	300	23.5	30.0	85
GCTCBC400	400	28.5	36.5	85
GCTCBC500	500	30.0	39.0	100
GCTCBC630	630	35.0	45.0	110