



Cable Lug Terminals

Product features:

- Excellent corrosion resistance and conductivity.
- Bell mouth for easy cable entry.
- Used for terminating onto studs or bolts for heavy duty applications.
- Terminal has an inspection hole to ensure cable is fully inserted.

Technical Information


Material

Terminal body: Copper. **Plating:** Bright electro tin.



Material

- ① Copper
- ② Bright electro tin

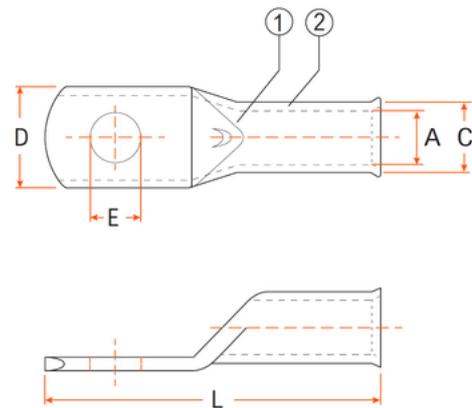

GTSE SKU	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	B	D	L
GCTCL4-6	4	6.5	3.1	4.8	10	20
GCTCL6-4	6	4.2	3.8	5.5	10	23
GCTCL6-5	6	5.2	3.8	5.5	10	23
GCTCL6-6	6	6.5	3.8	5.5	10	24
GCTCL6-8	6	8.2	3.8	5.5	12	24
GCTCL6-10	6	10.5	3.8	5.5	15	27
GCTCL10-5	10	5.2	4.5	7.1	11	25
GCTCL10-6	10	6.5	4.5	6.2	11	25
GCTCL10-8	10	8.2	4.5	6.2	12	27
GCTCL10-10	10	10.5	4.5	7.1	15	35
GCTCL10-12	10	12.7	4.5	7.5	15	35
GCTCL16-5	16	5.2	5.4	7.0	12	30
GCTCL16-6	16	6.5	5.4	7.0	12	32
GCTCL16-8	16	8.2	5.4	7.0	12	32
GCTCL16-10	16	10.5	5.4	7.0	15	40
GCTCL16-12	16	12.7	5.4	7.0	17	40
GCTCL25-6	25	6.5	6.8	8.8	13	30
GCTCL25-8	25	8.2	6.8	8.8	13	30
GCTCL25-10	25	10.5	6.8	8.8	15	30
GCTCL25-12	25	12.7	6.8	8.8	16	30

GTSE SKU	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	C	D	L
GCTCL35-6	35	6.5	8.2	10.2	16	35
GCTCL35-8	35	8.2	8.2	10.2	16	35
GCTCL35-10	35	10.5	8.2	10.2	16	35
GCTCL35-12	35	12.7	8.2	10.2	18	42
GCTCL35-14	35	14.7	8.2	10.5	23	44
GCTCL50-6	50	6.5	9.5	12.0	18	49
GCTCL50-8	50	8.2	9.5	12.0	18	43
GCTCL50-10	50	10.5	9.5	12.0	18	43
GCTCL50-12	50	12.7	9.5	12.0	20	43
GCTCL50-14	50	14.7	9.5	12.0	21	43
GCTCL50-17	50	17.0	9.5	12.0	21	43
GCTCL70-6	70	6.5	11.2	14.5	21	50
GCTCL70-8	70	8.2	11.2	14.5	21	50
GCTCL70-10	70	10.5	11.2	14.5	21	50
GCTCL70-12	70	12.7	11.2	14.5	21	50
GCTCL70-14	70	14.7	11.2	14.5	22	50
GCTCL70-17	70	17.0	11.2	14.5	26	57
GCTCL95-8	95	6.5	13.5	17.2	25	56
GCTCL95-8	95	8.2	13.5	17.0	25	60
GCTCL95-10	95	10.5	13.5	17.0	25	55
GCTCL95-12	95	12.7	13.5	17.0	25	55
GCTCL95-14	95	14.7	13.5	17.0	25	55
GCTCL95-17	95	17.0	13.5	17.0	25	55
GCTCL95-21	95	21.0	13.5	17.2	28	64
GCTCL120-8	120	8.2	15.0	19.0	28	60
GCTCL120-10	120	10.5	15.0	19.0	28	60
GCTCL120-12	120	12.7	15.0	19.0	28	60
GCTCL120-14	120	14.7	15.0	19.0	28	60
GCTCL120-17	120	17.0	15.0	19.0	28	60
GCTCL150-8	150	8.4	16.5	21.0	30	69
GCTCL150-10	150	10.5	16.5	21.0	30	69
GCTCL150-12	150	12.7	16.5	21.0	30	69
GCTCL150-14	150	14.7	16.5	21.0	30	69
GCTCL150-17	150	17.0	16.5	21.0	30	69
GCTCL150-21	150	21.0	16.5	21.0	30	69
GCTCL185-10	185	10.5	18.5	23.0	34	78
GCTCL185-12	185	12.7	18.5	23.0	34	78
GCTCL185-14	185	14.7	18.5	23.0	34	78
GCTCL185-17	185	17.0	18.5	23.0	34	78
GCTCL185-21	185	21.0	18.5	23.0	34	78
GCTCL240-10	240	10.5	21.5	26.0	38	92
GCTCL240-12	240	12.7	21.5	26.0	38	92
GCTCL240-14	240	14.7	21.5	26.0	38	92
GCTCL240-17	240	17.0	21.5	26.0	38	92

GTSE SKU	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	C	D	L
GCTCL240-21	240	21.0	21.5	26.0	38	92
GCTCL300-8	300	8.4	23.5	29.0	42	100
GCTCL300-10	300	10.5	23.5	29.0	43	101
GCTCL300-13	300	12.7	23.5	29.0	43	101
GCTCL300-14	300	14.7	24.0	29.0	43	101
GCTCL300-17	300	17.0	24.0	29.0	43	101
GCTCL300-21	300	21.0	23.5	29.0	43	101
GCTCL400-10	400	10.5	30.0	52	52	117
GCTCL400-13	400	13.0	28.5	53	53	114
GCTCL400-14	400	14.7	28.5	53	53	114
GCTCL400-17	400	17.0	28.5	53	53	114
GCTCL400-21	400	21.0	29.0	53	53	114
GCTCL500-13	500	13.0	30.0	56	56	124
GCTCL500-14	500	14.7	30.0	56	56	124
GCTCL500-17	500	17.0	30.0	56	56	124
GCTCL500-21	500	21.0	30.0	56	56	124
GCTCL630-13	630	13.0	35.0	64	64	144
GCTCL630-14	630	14.7	35.0	64	64	144
GCTCL630-17	630	17.0	35.0	64	64	144
GCTCL630-21	630	21.0	35.0	64	64	144