



# Copper Tube Pins


## Product features:

- Excellent corrosion resistance and conductivity.
- Commonly used with cables carrying higher currents.

### Technical Information

Material

**Terminal body:** Copper | **Plating:** Bright electro tin

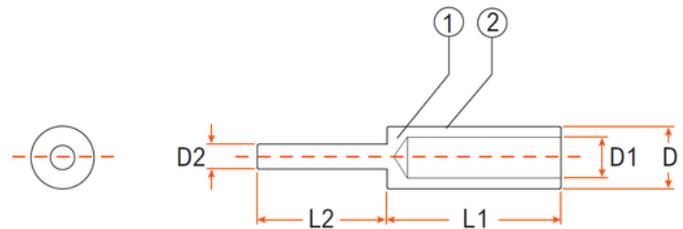

### Material

- ① Copper
- ② Bright electro tin

GTSE SKU	Wire Range (mm <sup>2</sup> )	Max. Amperage	Dimensions (mm)				
			D	d1	d2	L1	L2
GTSE-CTP10	10	13	6.0	4.2	2.8	13.2	10.2
GTSE-CTP16	16	20	7.0	5.3	3.7	16.6	13.6
GTSE-CTP25	25	32	9.0	7.0	4.8	19.5	18.5
GTSE-CTP35	35	45	10.0	8.0	5.0	21.5	18.5
GTSE-CTP50	50	65	11.5	9.5	7.3	21.3	19.0
GTSE-CTP70	70	90	16.0	11.5	7.4	28.5	17.7
GTSE-CTP95	95	120	17.0	13.2	7.5	27.5	18.4
GTSE-CTP120	120	150	19.0	15.2	9.8	30.0	24.6
GTSE-CTP150	150	190	22.0	17.0	10.0	32.0	24.0
GTSE-CTP185	185	240	25.3	18.0	7.8	35.7	24.8
GTSE-CTP240	240	300	26.5	22.3	15.7	46.0	32.1
GTSE-CTP300	300	390	28.7	24.0	15.6	50.4	32.0
GTSE-CTP400	400	550	32.2	27.2	15.9	53.4	32.1