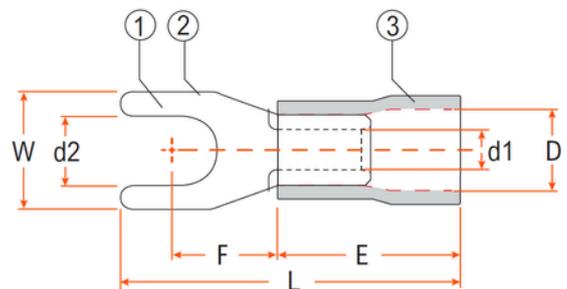


Fork Terminals

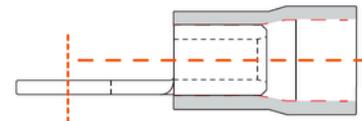

Product features:

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-10°C to +75°C
Material	Conductor: Copper Insulation: Vinyl Plating: Tin
Voltage rating:	600V


Material

- ① Brass
- ② Tin
- ③ Vinyl



GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)						
			D	d1	d2	W	L	E	F
GCTF32R	Red	0.5-1.5	4.3	1.7	3.3	5.7	21.0	10.0	6.5
GCTF37R	Red	0.5-1.5	4.3	1.7	3.8	5.7	21.0	10.0	6.5
GCTF43R	Red	0.5-1.5	4.3	1.7	4.4	6.4	21.0	10.0	6.5
GCTF53R	Red	0.5-1.5	4.3	1.7	5.4	8.1	21.0	10.0	6.5
GCTF64R	Red	1.5-2.5	4.3	1.7	6.6	9.5	21.0	10.0	6.5
GCTF32B	Blue	1.5-2.5	4.8	2.3	3.3	5.7	21.0	10.0	6.5
GCTF37B	Blue	1.5-2.5	4.8	2.3	3.8	5.7	21.0	10.0	6.5
GCTF43B	Blue	1.5-2.5	4.8	2.3	4.4	6.4	21.0	10.0	6.5
GCTF53B	Blue	1.5-2.5	4.8	2.3	5.4	8.1	21.0	10.0	6.5
GCTF64B	Blue	1.5-2.5	4.8	2.3	6.6	9.3	21.0	10.0	6.5
GCTF37Y	Yellow	4.0-6.0	6.7	3.4	3.8	8.3	25.5	13.0	7.0
GCTF43Y	Yellow	4.0-6.0	6.7	3.4	4.4	8.3	25.5	13.0	7.0
GCTF53Y	Yellow	4.0-6.0	6.7	3.4	5.4	9.0	25.5	13.0	7.0
GCTF64Y	Yellow	4.0-6.0	6.7	3.4	6.6	9.0	25.5	13.0	7.0
GCTF84Y	Yellow	4.0-6.0	6.7	3.4	8.5	14.0	30.5	13.0	11.5