

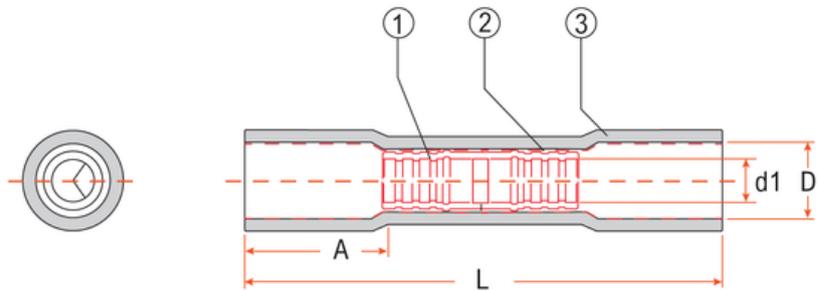


Heat Shrink Butt Connector Terminals

Product features:

- Lined with hot melt adhesive.
- Low insertion force and easy crimping whilst ensuring secure termination

Technical Information	
Operating Temperature	-45°C to +125°C
Material	Conductor: Copper Insulation: Polyethylene Plating: Tin
Voltage rating	600V
Shrinkable Temperature	+125°C to +180°C


Material

- ① Copper
- ② Tin
- ③ Polyethylene

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)			
			A	D	d1	L
GCHSBC45R	■	0.5-1.5	10.5	4.5	1.7	36.0
GCHSBC55B	■	1.5-2.5	10.5	5.5	2.3	36.0
GCHSBC65Y	■	4.0-6.0	13.8	6.5	3.4	41.0