




Heat Shrink Female Bullet Terminals

Product features:

- Lined with hot melt adhesive.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information

Operating Temperature	-45°C to +125°C
Material	Conductor: Brass Sleeve: Copper tubular Insulation: Polyethylene Plating: Tin
Voltage rating:	600V max
Shrinkable Temperature	+125°C to +180°C.

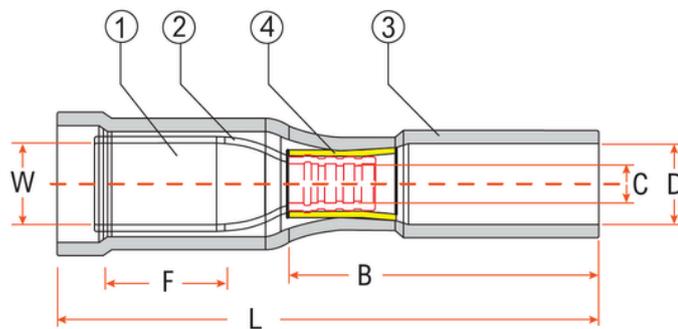

Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)				
			B	C	W	L	F
GCTHSBUF4R	■	0.5-1.5	18	1.7	6.5	30.0	7.3
GCTHSBUF5B	■	1.5-2.5	18	2.3	6.5	30.0	8.5
GCTHSBUF5Y	■	4.0-6.0	18	3.4	6.5	31.0	8.5