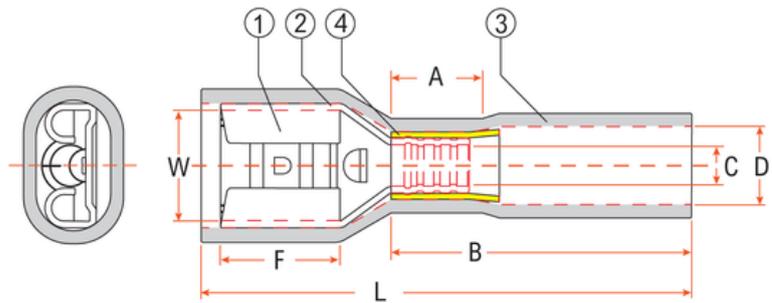


Heat Shrink Female Spade Fully Insulated Terminals


Product features:

- Lined with hot melt adhesive.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-45°C to +125°C
Material	Conductor: Brass Sleeve: Copper tubular Insulation: Polyethylene Plating: Tin
Voltage rating:	600V max
Shrinkable Temperature	+125°C to +180°C.


Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

GTSE SKU	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)				
				B	C	W	L	F
GCTHSFIFS63R		0.5-1.5	0.8 x 6.35	1.7	8.5	6.5	28.0	7.5
GCTHSFIFS63B		1.5-2.5	0.8 x 6.35	2.3	8.5	6.5	28.0	7.5
GCTHSFIFS63Y		4.0-6.0	0.8 x 6.35	3.4	8.5	6.5	28.0	7.5