




# Heat Shrink Male Blade Terminals

## Product features:

- Lined with hot melt adhesive.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-45°C to +125°C
Material	<b>Conductor:</b> Brass   <b>Sleeve:</b> Copper tubular   <b>Insulation:</b> Polyethylene   <b>Plating:</b> Tin
Voltage rating:	600V max
Shrinkable Temperature	+125°C to +180°C.

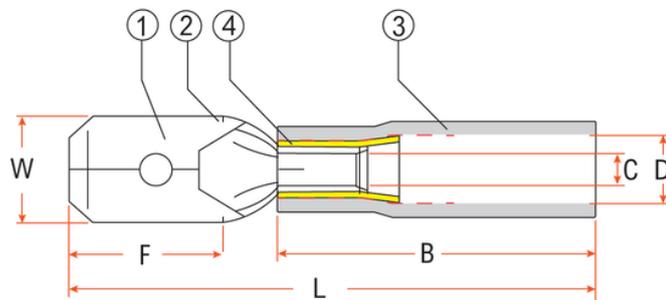

## Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

GTSE SKU	Colour	Wire Range (mm <sup>2</sup> )	Tab Size	Dimensions (mm)					
				B	C	D	W	L	F
GCTHSTM63R	<span style="color: red;">■</span>	0.5-1.5	0.8 x 6.35	25	1.7	3.9	6.35	35.0	7.7
GCTHSTM63B	<span style="color: blue;">■</span>	1.5-2.5	0.8 x 6.35	25	2.3	4.7	6.35	35.0	7.7
GCTHSTM63Y	<span style="color: yellow;">■</span>	4.0-6.0	0.8 x 6.35	26	3.4	6.3	6.35	35.0	7.7