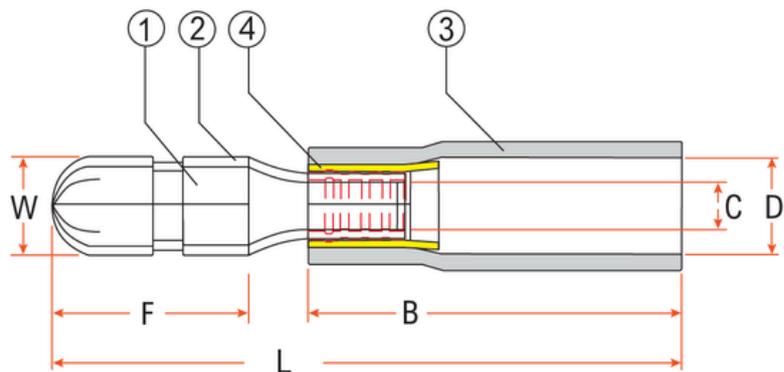


Heat Shrink Male Bullet Terminals


Product features:

- Lined with hot melt adhesive.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-45°C to +125°C
Material	Conductor: Brass Sleeve: Copper tubular Insulation: Polyethylene Plating: Tin
Voltage rating:	600V max
Shrinkable Temperature	+125°C to +180°C.


Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

GTSE SKU	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)					
				B	C	D	W	L	F
GCTHSBUM4R	■	0.5-1.5	0.8 x 6.35	25	1.7	3.9	4.0	36.0	8.5
GCTHSBUM5B	■	1.5-2.5	0.8 x 6.35	25	2.3	4.7	5.0	37.0	10.0
GCTHSBUM5Y	■	4.0-6.0	0.8 x 6.35	25	3.4	6.2	5.0	38.0	10.0