




Heat Shrink Solder Butt Connectors

Technical Information	
Material	Insulation: Polyethylene. Solder ring with flux. Glue ring adhesive.
Shrinkable Temperature	+125°C to +180°C.
Operating Temperature	-45°C to +125°C.
Voltage rating	600V max.

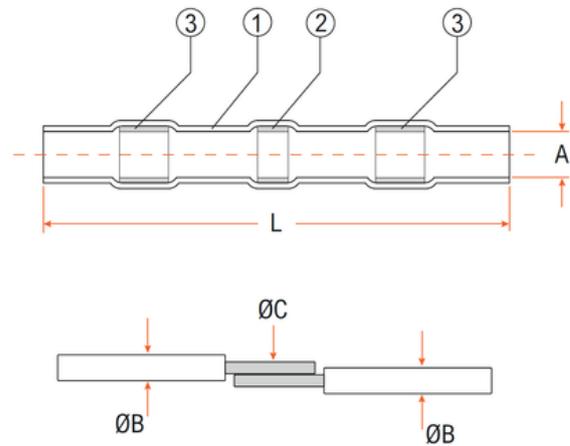

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)				
			W	L	W	L	L
GCTHSSBUC17C	White	0.25-0.34	1.7	0.4	1.7	0.8	26
GCTHSSBUC27R	Red	0.5-1.5	2.7	1.3	2.7	1.2	40
GCTHSSBUC45B	Blue	1.5-2.5	4.5	1.8	4.5	2.0	40
GCTHSSBUC60Y	Yellow	4.0-6.0	6.0	2.8	6.0	3.4	40