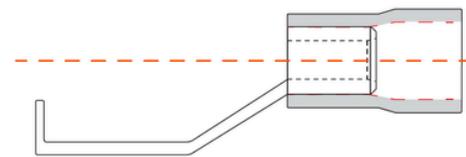
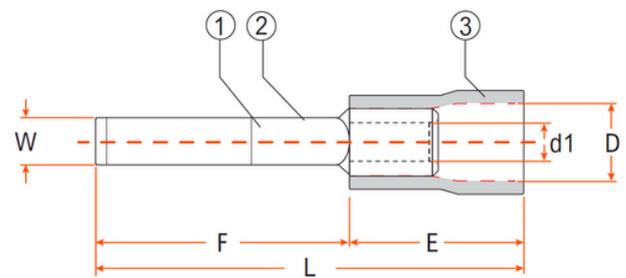


Lipped Blade Terminals


Product features:

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.

Technical Information	
Operating Temperature	-10°C to +75°C.
Material	Conductor: Copper Insulation: Vinyl Plating: Tin.
Voltage rating:	600V


Material

- ① Copper
- ② Tin
- ③ Vinyl

GTSE SKU	Colour	Wire Range (mm ²)	Dimensions (mm)						
			D	d1	W	L	E	F	T
GTSE-LBT30R	Red	0.5-1.5	4.3	1.7	3.0	25.2	10.0	15.6	0.8
GTSE-LBT46R	Red	0.5-1.5	4.3	1.7	4.6	25.2	10.0	15.6	0.8
GTSE-LBT30B	Blue	1.5-2.5	4.8	2.3	3.0	25.2	10.0	15.6	0.8
GTSE-LBT46B	Blue	1.5-2.5	4.8	2.3	4.6	25.2	10.0	15.6	0.8
GTSE-LBT46Y	Yellow	4.0-6.0	6.7	3.4	4.6	30.2	13.0	17.2	1.0