

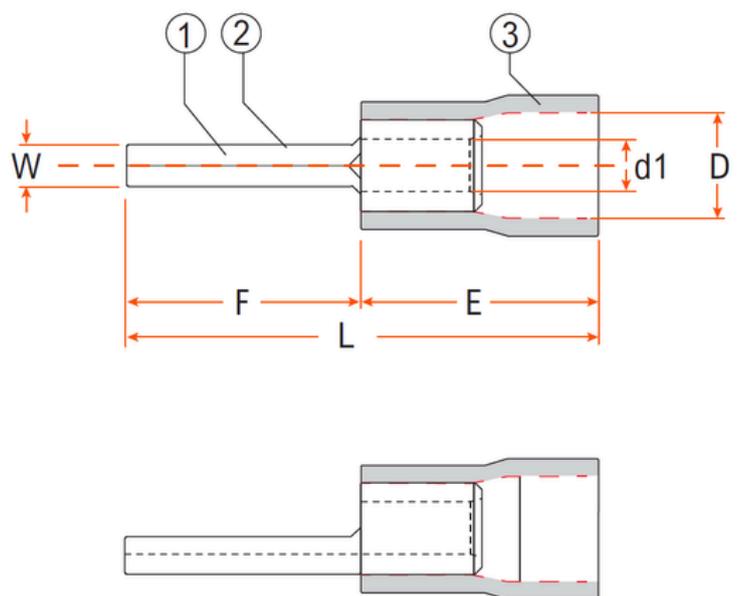


Pin Terminals

Product features:

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.

| Technical Information | |
|-----------------------|---|
| Operating Temperature | -10°C to +75°C |
| Material | Conductor: Copper Insulation: Vinyl Plating: Tin |
| Voltage rating: | 600V |


Material

- ① Copper
- ② Tin
- ③ Vinyl

| GTSE SKU | Colour | Wire Range (mm ²) | Dimensions (mm) | | | | | |
|-----------|---------------------------------------|-------------------------------|-----------------|-----|-----|------|------|------|
| | | | D | d1 | W | L | E | F |
| GCTP9R | ■ | 0.5-1.5 | 4.3 | 1.7 | 1.9 | 18.8 | 10.0 | 9.0 |
| GCTP12R | ■ | 0.5-1.5 | 4.3 | 1.7 | 1.9 | 21.8 | 10.0 | 12.0 |
| GCTP199B | ■ | 1.5-2.5 | 4.8 | 2.3 | 1.9 | 18.8 | 10.0 | 9.0 |
| GCT1912B | ■ | 1.5-2.5 | 4.8 | 2.3 | 1.9 | 21.8 | 10.0 | 12.0 |
| GCTP2914Y | ■ | 4.0-6.0 | 6.7 | 3.4 | 2.8 | 26.0 | 13.0 | 13.0 |