



Lucar Type Male Quick Disconnect

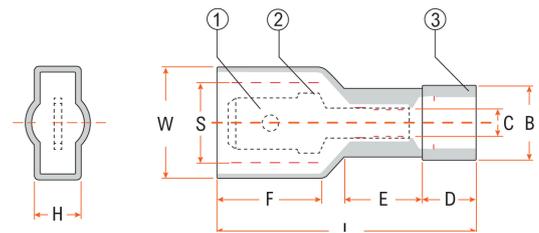
Product features:

- Flared barrel for easy wire insertion.

Technical Information	
Operating Temperature	-40°C to +105°C.
Material	Conductor: Brass Insulation: Nylon Plating: Tin
Voltage rating:	300V.


Material

- ① Brass
- ② Tin
- ③ Nylon



GTSE SKU	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)									
				B	C	D	W	L	E	F	H	S	
GCTLMB63B	■	1.5-2.5	0.8 x 6.35	6.4	4.4	4.4	11	23.3	6.5	10.5	5.6	10	

Lucar Type Female Quick Disconnect

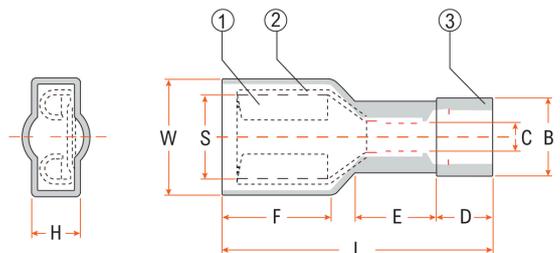

Product features:

- Flared barrel for easy wire insertion.

Technical Information	
Operating Temperature	-40°C to +105°C.
Material	Conductor: Brass Insulation: Nylon Plating: Tin
Voltage rating:	300V.


Material

- ① Brass
- ② Tin
- ③ Nylon



GTSE SKU	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)									
				B	C	D	W	L	E	F	H	S	
GCTLFB63B	■	1.5-2.5	0.8 x 6.35	6.4	4.4	4.4	9.7	21.8	6.5	9.0	4.0	8.7	