





Piggy Back Disconnects

Product features:

- Flared barrel for easy wire insertion.
- Low insertion force and easy crimping whilst ensuring secure termination.
- (L suffix on Item No. denotes long internal copper sleeve).



Technical Information	
Operating Temperature	-10°C to +75°C.
Material	Conductor: Brass Sleeve: Copper tubular Insulation: Vinyl Plating: Tin
Voltage rating:	300V.

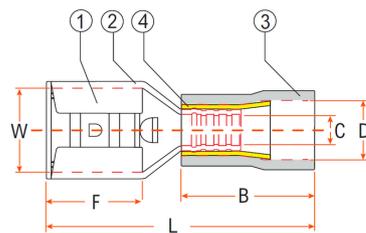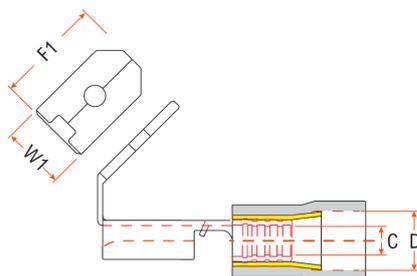

Standard Internal Copper Sleeve

Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

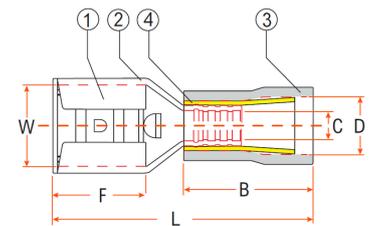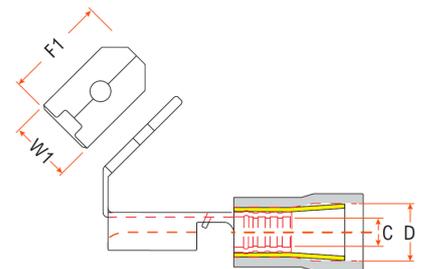

Long Internal Copper Sleeve

GTSE SKU	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)							
				B	C	D	W	W1	L	F	F1
GCTPB63R	Red	0.5-1.5	0.8 x 6.35	10.0	1.7	3.8	6.7	6.35	21.0	8.0	8.2
GCTPB63RL	Red	0.5-1.5	0.8 x 6.35	10.0	1.7	3.8	6.7	6.35	21.0	8.0	8.2
GCTPB63B	Blue	1.5-2.5	0.8 x 6.35	10.0	2.3	4.7	6.7	6.4	21.0	8.0	8.2
GCTPB63BL	Blue	1.5-2.5	0.8 x 6.35	10.0	2.3	4.7	6.7	6.4	21.0	8.0	8.2
GCTPB63Y	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.2	6.7	6.4	24.5	8.0	8.2
GCTPB63YL	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.2	6.7	6.4	24.5	8.0	8.2