

Push Mount Cable Ties










Product features:

- Push mount cable ties are ideal for firmly fixing cable ties to a surface to secure the tie
- Perfect for applications that require one-step fastening, as the tie can be pushed into a pre-drilled hole
- High temperature range and resistant to external agents

Technical Information	
Quantity	100 cable ties per pack
Material	UL Listed Nylon 66, 94V-2
Operating temperature	-40°C to +85°C

Push Mount (Non-Winged)

Integral non-winged mounting device that locks into place when pushed into a pre-drilled hole

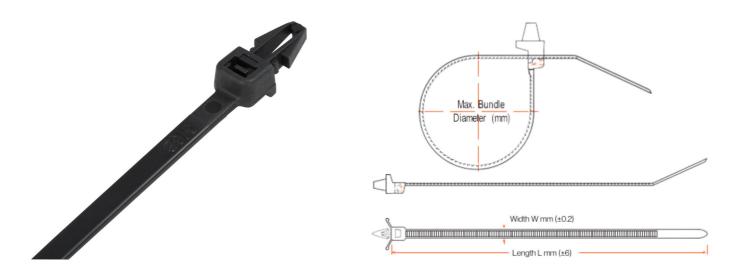

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
200 x 4.8	50	22	400	GCT20048PM	

^{*}Box quantity refers to quantity of packs

Please specify the colour after the Part No./SKU:


Colour Key: Black: B, Natural: N

Email: sales@gtse.co.uk
Tel: 01246 386 126



Push Mount (Winged)

Integral winged mounting device that locks into place when pushed into a pre-drilled hole

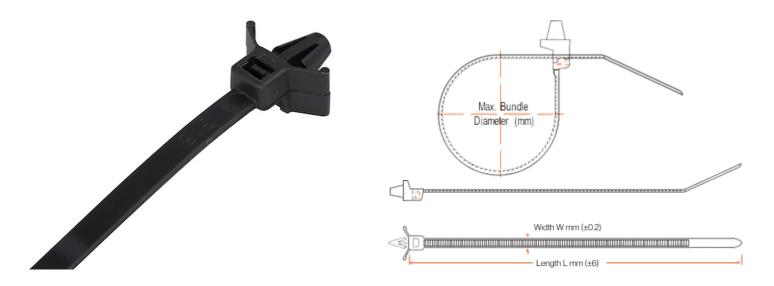

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
100 x 2.5	25	8	220	GCT10025WM	
100 x 4.8	25	22	90	GCT10048WM	
200 x 4.8	50	22	80	GCT20048WM	

^{*}Box quantity refers to quantity of packs

Please specify the colour after the Part No./SKU.

Colour Key: Black: B, Natural: N

Disclaimer Notice

The above infomation is given only as guide, the user should ensure that the performance of the product is sufficient for application.

The quoted values are average and should not be taken as maximum or minimum values for specific purposes.

GTSE cannot be held responsible for product failure unless full testing has been carried out.

The user has to decide on the cable ties suitability for their own applications.

Email: sales@gtse.co.uk
Tel: 01246 386 126