

Standard Nylon Cable Ties — Black and Natural/White




Product features:

- High tensile strength with low insertion force
- Excellent resistance to weathering and external agents
- Self-locking for fast and easy application

Technical Information

Quantity	100 cable ties per pack
Material	UL Listed Nylon 66, 94V-2
Operating temperature	-40°C to +85°C
Flammability rating	UL 94 class V2
Dielectric strength	50,000 volts/mm
Compliance	European directives: ROHS - 2002/95/EC, ELV - 2000/53/EC, WEEE - 2002/96/EC

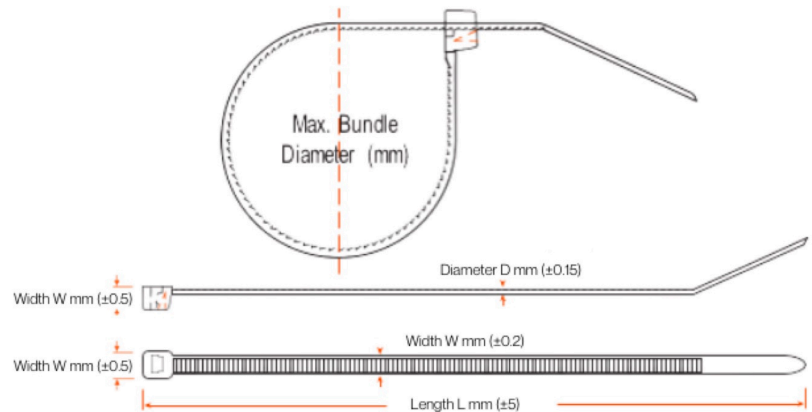

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
80 x 2.5	16	8	700	GCT8025	<input type="checkbox"/> <input type="checkbox"/>
100 x 2.5	22	8	550	GCT10025**	<input type="checkbox"/> <input type="checkbox"/>
120 x 2.5	28	8	450	GCT12025	<input type="checkbox"/> <input type="checkbox"/>
120 x 4.8	27	22	200	GCT12048	<input type="checkbox"/> <input type="checkbox"/>
150 x 3.6	36	18	250	GCT15036**	<input type="checkbox"/> <input type="checkbox"/>
150 x 7.6	32	55	80	GCT15076	<input type="checkbox"/> <input type="checkbox"/>
160 x 2.5	43	8	400	GCT16025	<input type="checkbox"/> <input type="checkbox"/>

*Box quantity refers to quantity of packs

** Also available in the following colours: Blue, Brown, Green, Orange, Purple, Red, Silver and Yellow colours

Cable ties also available in fluorescent colours

Please specify the colour after the Part No./SKU.

Colour Key: Black: B, Natural: N

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
160 x 4.8	39	22	160	GCT16048	■ □
180 x 3.6	46	18	220	GCT18036	■ □
200 x 2.5	55	8	300	GCT20025**	■ □
200 x 3.6	53	18	200	GCT20036	■ □
200 x 4.8	52	22	150	GCT20048**	■ □
200 x 7.6	52	55	70	GCT20076	■ □
240 x 7.6	65	55	60	GCT24076	■ □
250 x 2.5	68	8	220	GCT25025	■ □
250 x 4.8	68	22	120	GCT25048	■ □
280 x 4.8	77	22	110	GCT28048	■ □
280 x 12.7	73	114	27	GCT280127	■ □
300 x 3.6	76	18	170	GCT30036**	■ □
300 x 4.8	83	22	120	GCT30048**	■ □
300 x 7.6	80	55	50	GCT30076	■ □
370 x 3.6	105	18	120	GCT37036	■ □
370 x 4.8	105	22	90	GCT37048**	■ □
370 x 7.6	101	55	40	GCT37076**	■ □
380 x 12.7	105	114	15	GCT380127	■ □
385 x 4.8	110	22	85	GCT39048	■ □
400 x 2.5	116	8	150	GCT40025	■ □
432 x 4.8	126	22	75	GCT43048	■ □
450 x 4.8	131	22	60	GCT45048	■ □
450 x 7.6	128	55	25	GCT45076	■ □
450 x 9.0	128	80	25	GCT45090**	■ □
480 x 12.7	137	114	15	GCT480127	■ □
500 x 4.8	147	22	50	GCT50048	■ □
550 x 4.8	162	22	56	GCT55048	■ □
550 x 7.6	160	55	20	GCT55076	■ □
550 x 9.0	160	80	25	GCT55090**	■ □
580 x 12.7	169	114	12	GCT580127	■ □
610 x 9.0	177	80	20	GCT61090	■ □
635 x 4.8	189	22	40	GCT63048	■ □

*Box quantity refers to quantity of packs

** Also available in the following colours: Blue, Brown, Green, Orange, Purple, Red, Silver and Yellow colours

Cable ties also available in fluorescent colours

Please specify the colour after the Part No./SKU.

Colour Key: Black: B, Natural: N

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
710 x 9.0	209	80	20	GCT71090	■ □
730 x 4.8	216	22	40	GCT73048	■ □
730 x 12.7	216	114	10	GCT730127	■ □
750 x 7.6	218	55	20	GCT75076	■ □
762 x 9.0	227	80	20	GCT78090**	■ □
812 x 9.0	243	80	15	GCT81290	■ □
880 x 12.7	264	114	15	GCT880127	■ □
914 x 9.0	275	80	12	GCT91490	■ □
1030 x 12.7	312	114	6	GCT1030127	■ □
1168 x 9.0	365	80	10	GCT116890	■ □
1219 x 9.0	372	80	10	GCT122090	■ □
1500 x 9.0	462	80	5	GCT150090	■ □
1530 x 12.7	470	114	6	GCT1530127	■ □

*Box quantity refers to quantity of packs

** Also available in the following colours: Blue, Brown, Green, Orange, Purple, Red, Silver and Yellow colours

Cable ties also available in fluorescent colours

Please specify the colour after the Part No./SKU.

Colour Key: Black: B, Natural: N

Disclaimer Notice

The above information is given only as guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.