

Trigger Releasable Cable Ties



(E474504)




Product features:

- Releasable mechanism can be secured, then intentionally released by hand
- High tensile strength with low insertion force
- Excellent resistance to weathering and external agents

Technical Information

Quantity	100 cable ties per pack
Material	UL Listed Nylon 66, 94V-2
Operating temperature	-40°C to +85°C
Flammability rating	UL 94 class V2
Dielectric strength	50,000 volts/mm

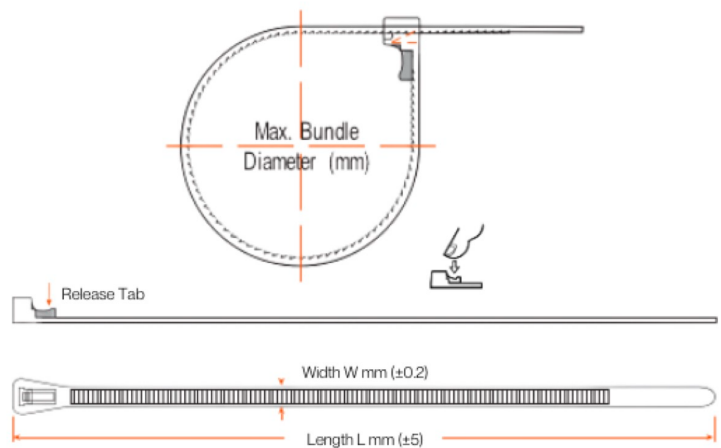

Length x Width (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength (kg)	Box Quantity*	SKU	Colour
150 x 7.6	35	22	100	GCT15076REL	Black, White
200 x 7.6	50	22	90	GCT20076REL	Black, White
250 x 7.6	65	22	75	GCT25076REL	Black, White, Blue, Brown, Green, Red, Yellow
300 x 7.6	80	22	65	GCT30076REL	Black, White
370 x 7.6	108	22	50	GCT37076REL	Black, White

*Box quantity refers to quantity of packs

Please specify the colour after the Part No./SKU:

Colour Key: Black: B, Natural: N, Blue: BLU, Brown: BRO, Green: GRE, Red: RED, Yellow: YEL

Disclaimer Notice

The above information is given only as guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.